AX 2014.01

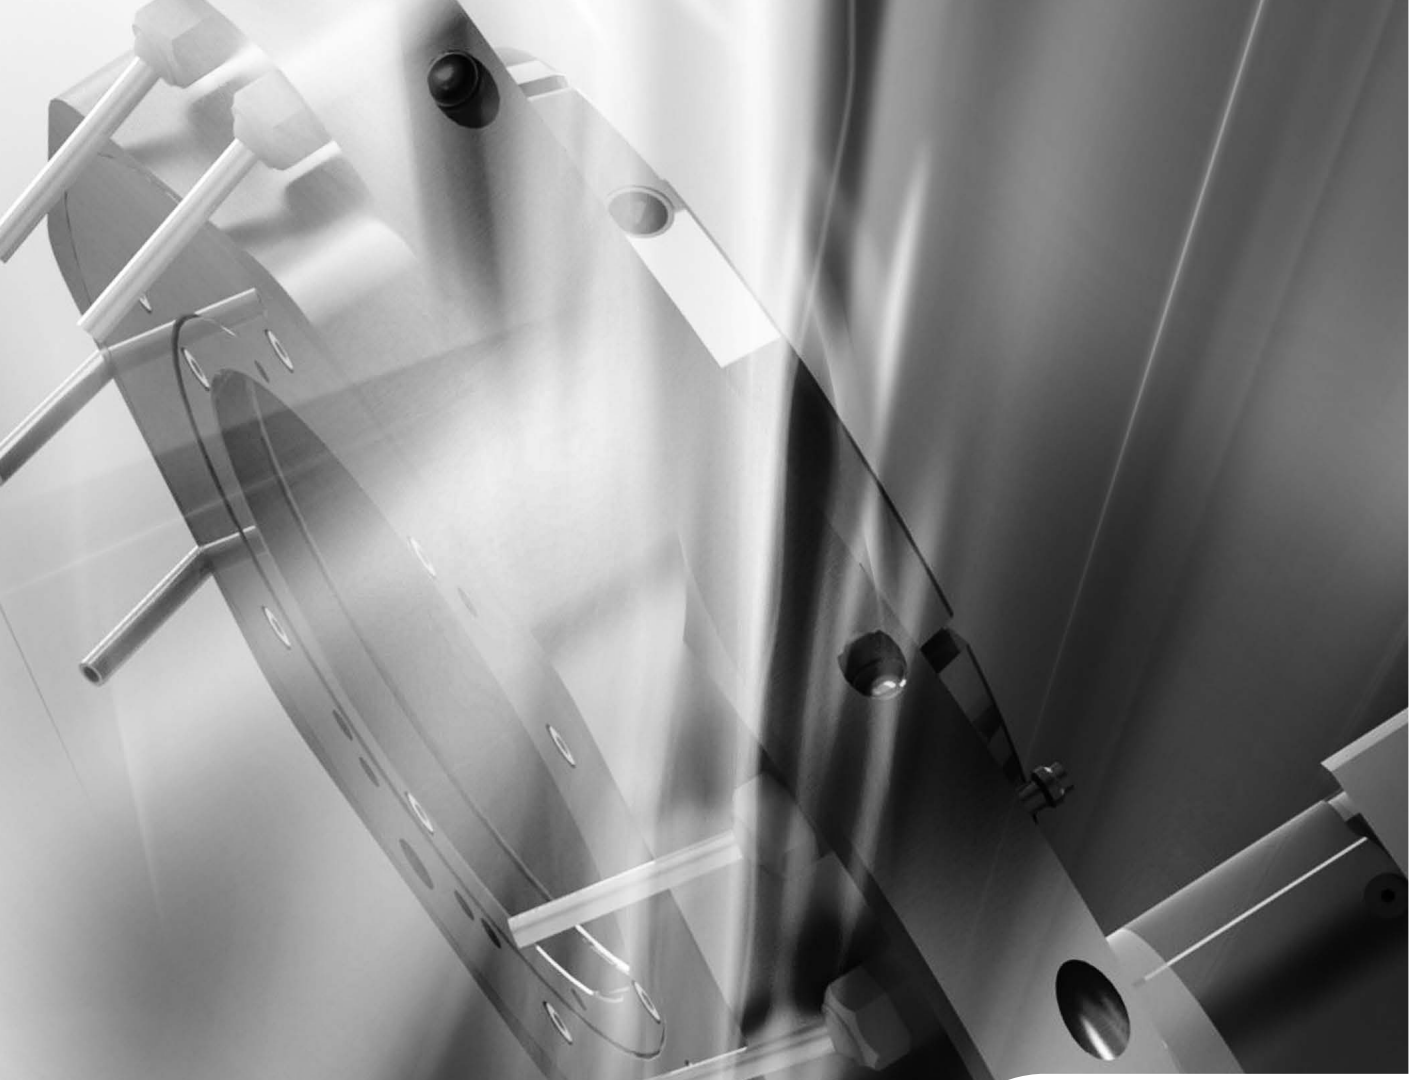

AX

QUARTO ASSE "C"

FOURTH AXE "C"

SACCARDO

THE E-MOTORS
COMPETENCE LEADER

www.saccardo.it

Caratteristiche dimensionali e di accoppiamento

Overall and fitting dimensions/Kupplungs-mass-eigenschaften
Carateriticas dimensionales y de acoplaje

AX ASSE "C"

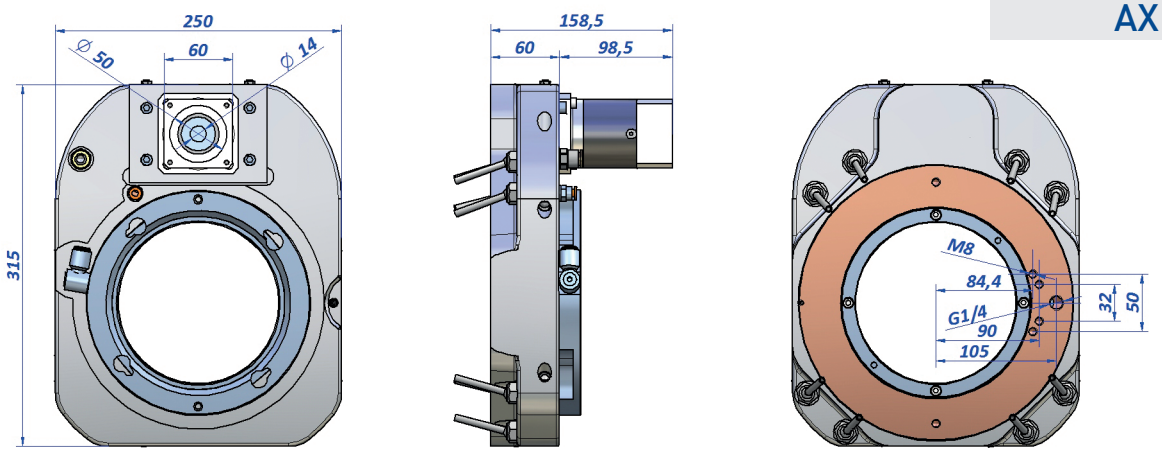

Caratteristiche tecniche

Technical details/Technische Eigenschaften/Carateristicas tecnicas

Rapporto di riduzione totale/Total reduction ratio/Untersetzungsverhältnis gesamt/Relación total de reducción	1:128
Precisione di posizionamento/Accuracy of position/Positionierungspräzision/Precisión de posicionamiento	<5'
Ripetibilità di posizionamento/Repeatability of positioning Wiederholbarkeit der Positionierung/Repetibilidad de posicionamiento	<0.1mm
Velocità di rotazione nominale/Rated outgoing speed/Nenndrehzahl/Velocidad de rotación nominal	20rpm
Velocità nominale in ingresso/Ingoing nominal speed/Nominale Eingangsgeschwindigkeit/Velocidad nominal en entrada	2560rpm
Peso/Weight/Gewicht/Peso	16kg

Opzionali

Optional/Optional/Opcional

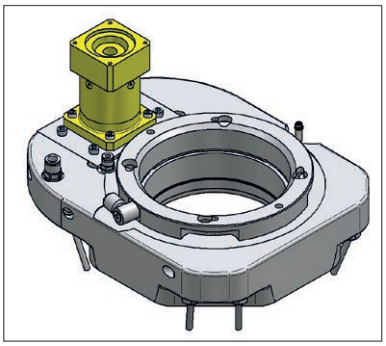

Accoppiamento al motore a richiesta
Customized motor mounting
Werkzeugaufnahme-Motorkupplung
Acoplamiento del motor especiale

Punti di connessione
Connection point
Das Schaltbild
Puntos de conexion

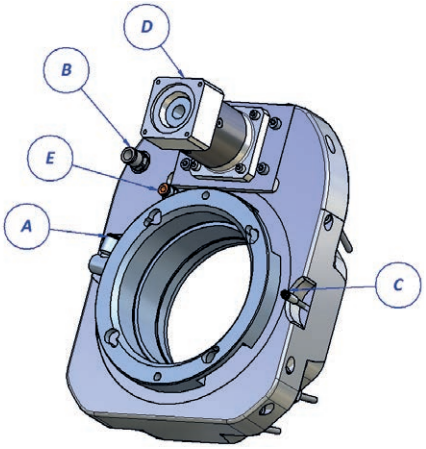

A - **Ingresso acqua per aggregato. Tubo Ø10mm, pressione 3bar**
Aggregate's water inlet.
Pipe Ø10mm pression max 3bar
Wassereintritt für Aggregat.
Rohr Ø10mm Druck max 3ba
Entrada agua para agregación.
Tubo Ø10mm presion max 3bar

B - **Ingresso acqua spruzzatori fissi. Tubo Ø10mm, pressione 3bar**
Water inlet for nozzles.
Pipe Ø10mm pression max 3bar
Wassereintritt feste Sprühdüsen.
Rohr Ø10mm Druck max 3bar
Entrada agua rociadores fijos.
Tubo Ø10mm presion max 3bar

C - **Sensore di posizionamento**
Homing sensor
Positioniersensor
Sensor de posicionamiento

D - **Accoppiamento motore**
Motor mounting
Motorkupplung
Acoplamiento del motor

E - **Pressurizzazione. Tubo Ø6mm, pressione 1,5bar**
Air inlet for pressurization.
Pipe Ø6mm pression max 1,5bar
Lufteingang für Überdruck.
Rohr Ø6mm Druck max 1,5bar
Entrada de aire para presurisacion.
Tubo Ø6mm presion max 1,5bar

Le caratteristiche dei motori inserite nel presente catalogo sono indicative, la ditta Saccardo Elettromeccanica si riserva di apportare, senza preavviso, modifiche ai componenti ove ritenuto necessario al fine di migliorare la qualità del motore in base alle conoscenze tecniche acquisite ed all'attuale stato dell'arte.
The specifications of the motors included in this catalogue are indicative, Saccardo Elettromeccanica reserves the right to introduce, without notice, changes to the components, where deemed necessary, in order to improve the quality of the motor, according to the technical know-how acquired and to the present state of art.

SACCARDO
THE E-MOTORS
COMPETENCE LEADER

Saccardo Elettromeccanica S.r.l.
Via Casa celeste, 10
36014 Santorso VI. ITALY
tel.:+39 0445 540542 - fax: +39 0445 540538
www.saccardo.it - info@saccardo.it

CSQ IQNet
CERTIFIED ISO 9001